


Factory MENU

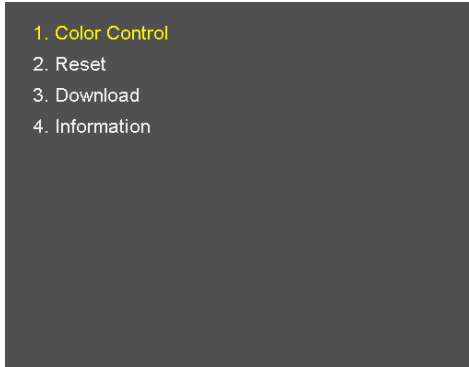

Factory mode menu entry


>Front key: "Menu" + "Down" for about 5 seconds. (Until the menu OSD disappears)

>There should be slight time gap between "Menu" and "Down" key.

Color Control (Do not modify these settings)

> Adjust the values SUB Brightness/Contrast/Red/Green/Blue.

(0~255)

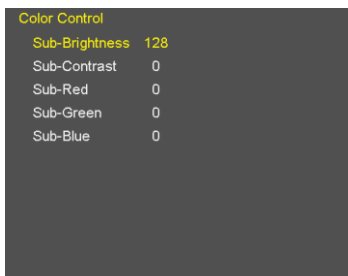

Reset (DO NOT RESET THESE)

● Reset Factory Default

- All setting values are initialized.

(Except Operating Time/Calibration Data)

● Reset Operating Time

- Operating Time reset.

● Reset Calibration Data

- Calibration Data reset.



FW Download / Upgrade

-Used to upgrade the firmware using a **FAT-32** formatted USB memory stick.


-Do not turn off the monitor while a Download is in process.

● FW Download

>Insert the USB memory stick containing ONLY the file "Thetis733.bin" into the USB port.

>Select the "**FW** Download" menu to start the firmware upgrade

>Time required: about 10 seconds

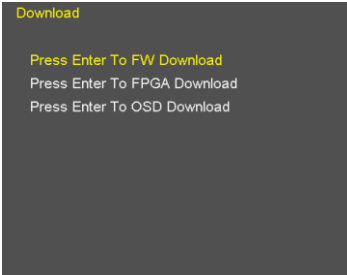

● FPGA Download

>Insert the USB memory stick containing ONLY the file "Thetis.pof" into the USB port.

>Select the "**FPGA** Download" menu to start the FPGA upgrade

>Time required: About 8 to 10 **minutes**

● OSD Download

>Insert the USB memory stick containing ONLY the files "Boland_OSD.dat" & "Boland_Font.dat" into the USB port.

>Select the "**OSD** Download" menu to start the OSD upgrade

>Time required: About 5 to 6 **minutes**

Version



> Version / Release day / Release time / Panel on Time